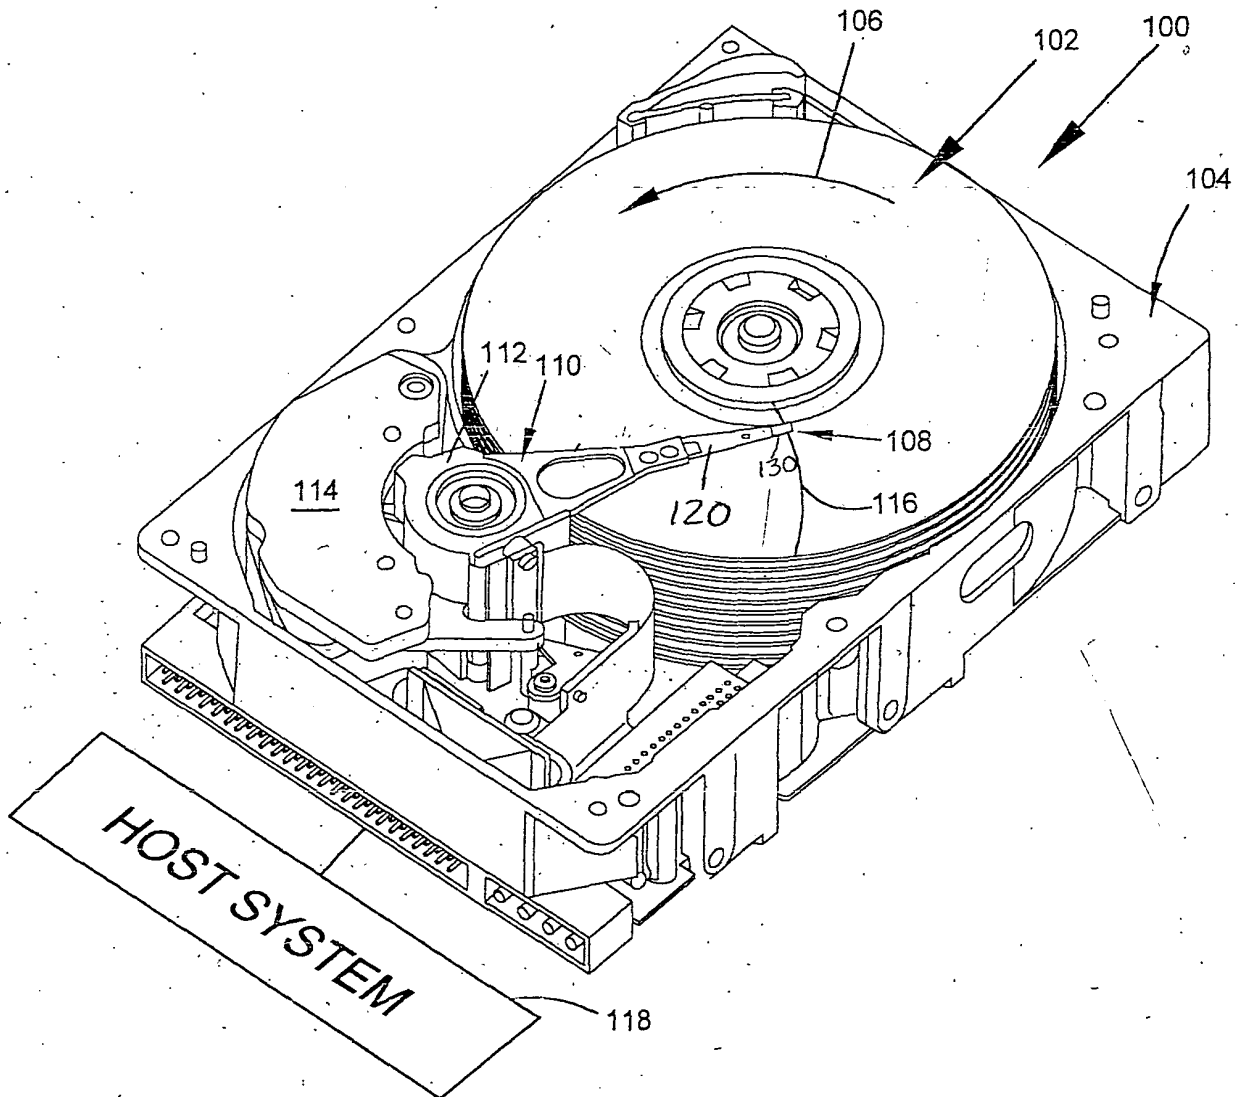


FIG. 1



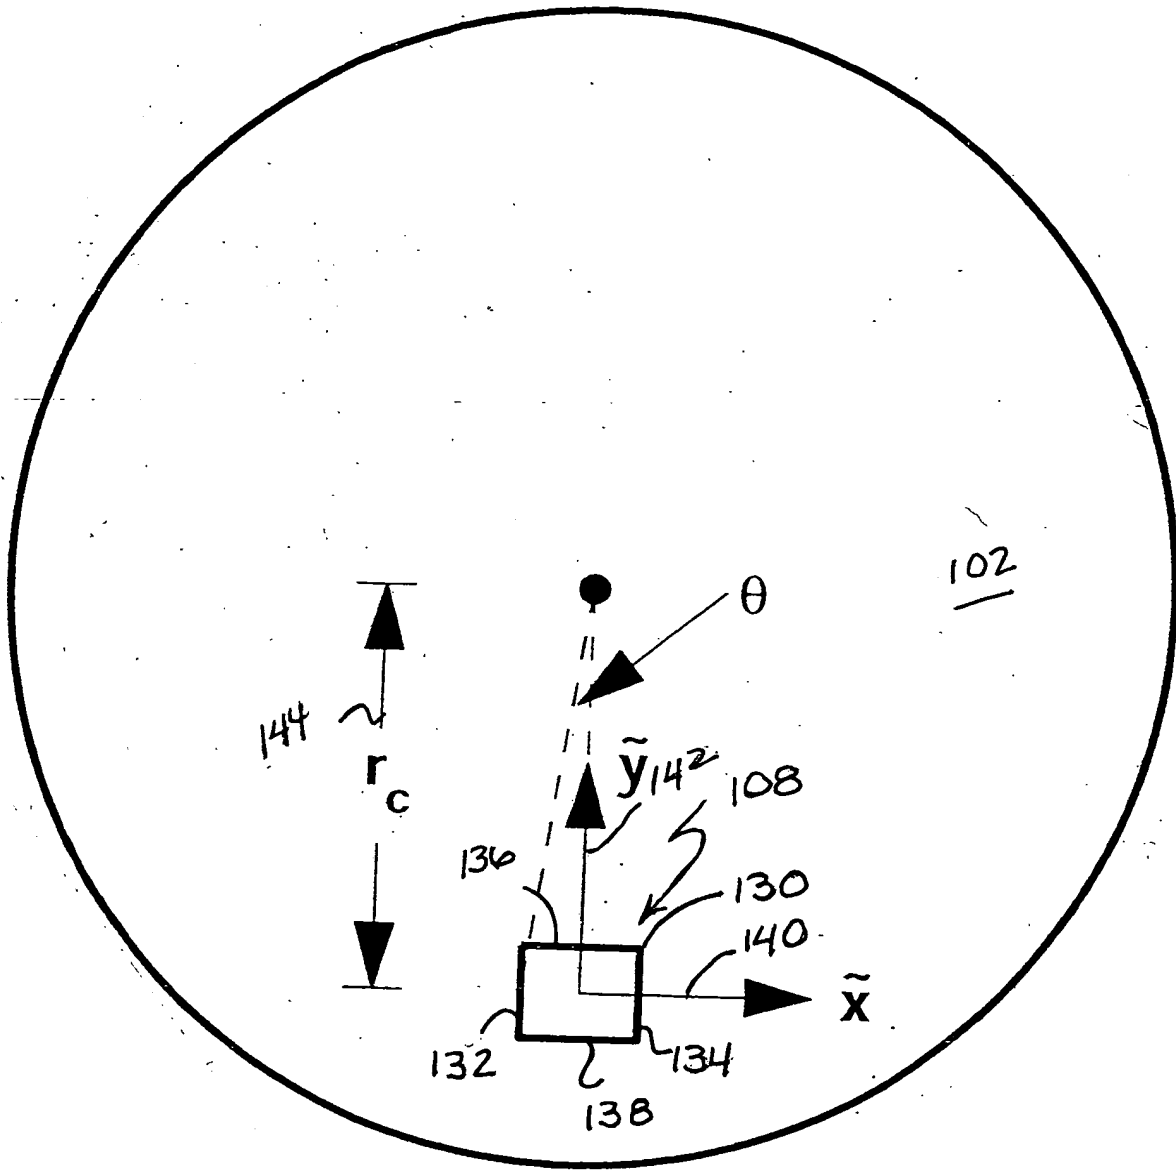


FIG. 2

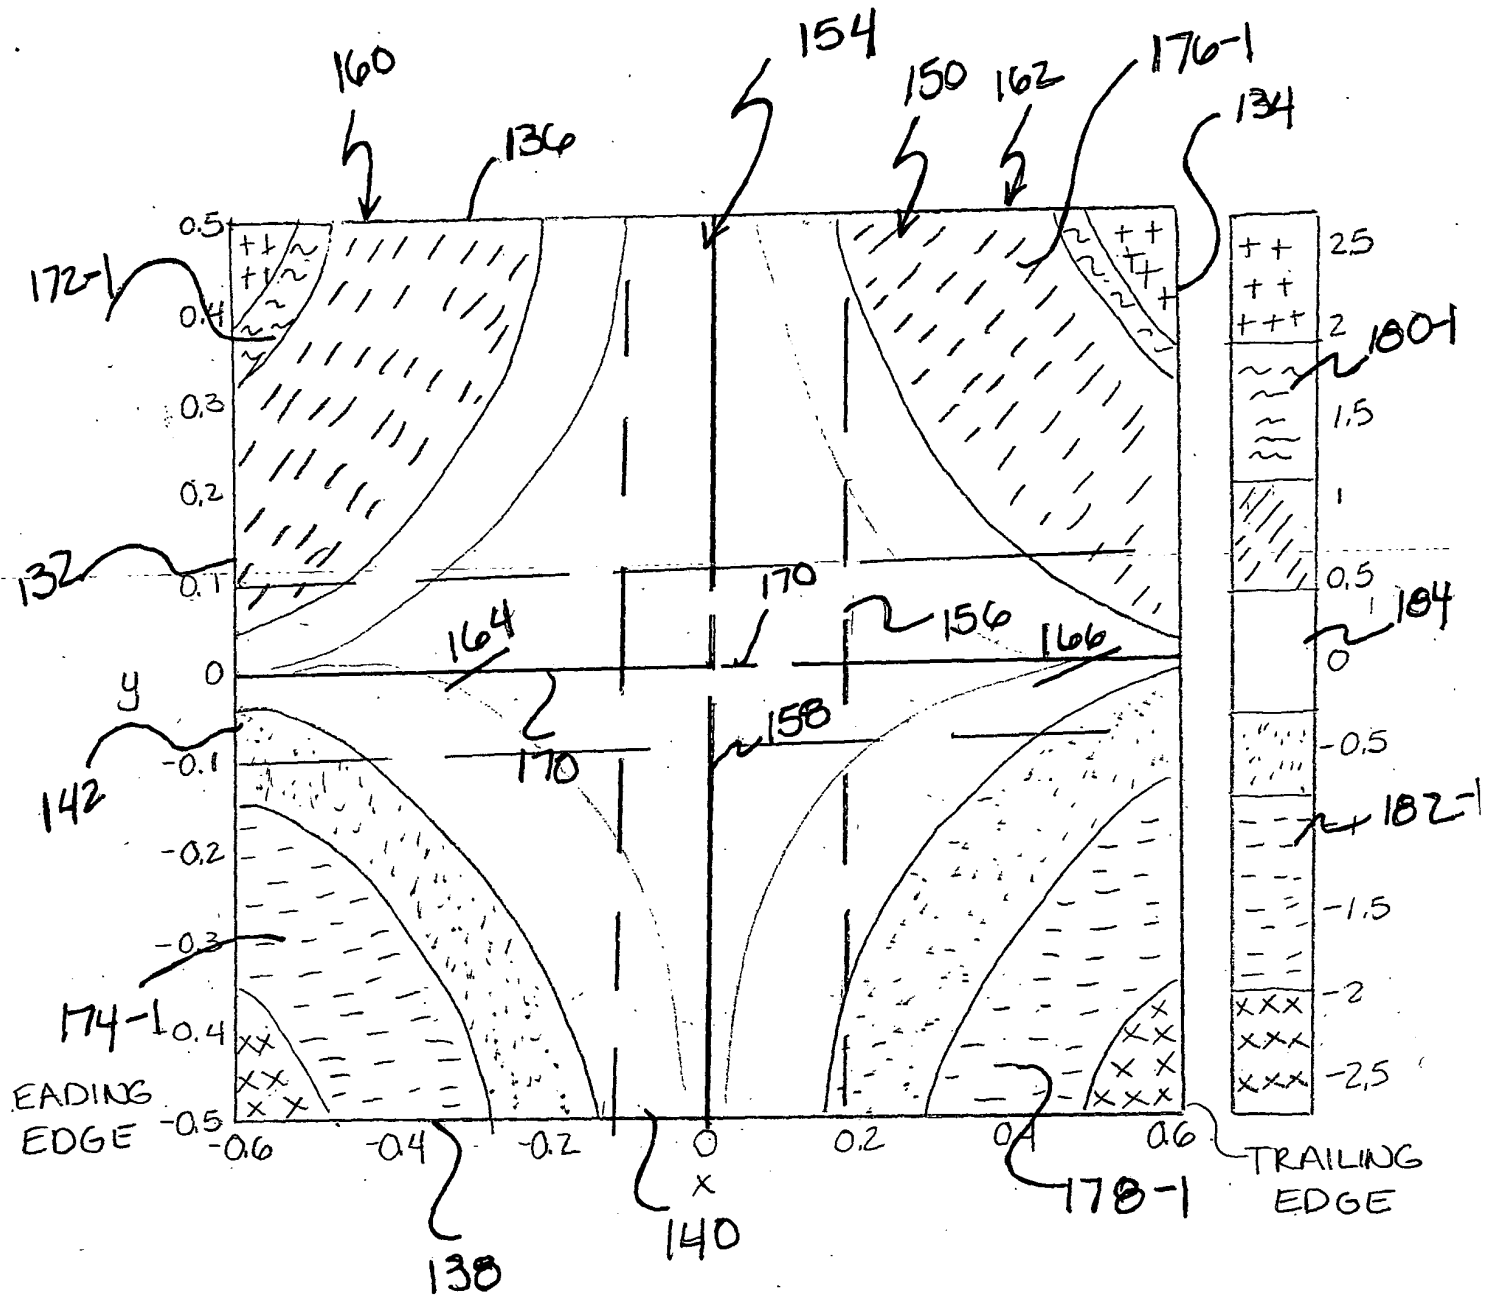
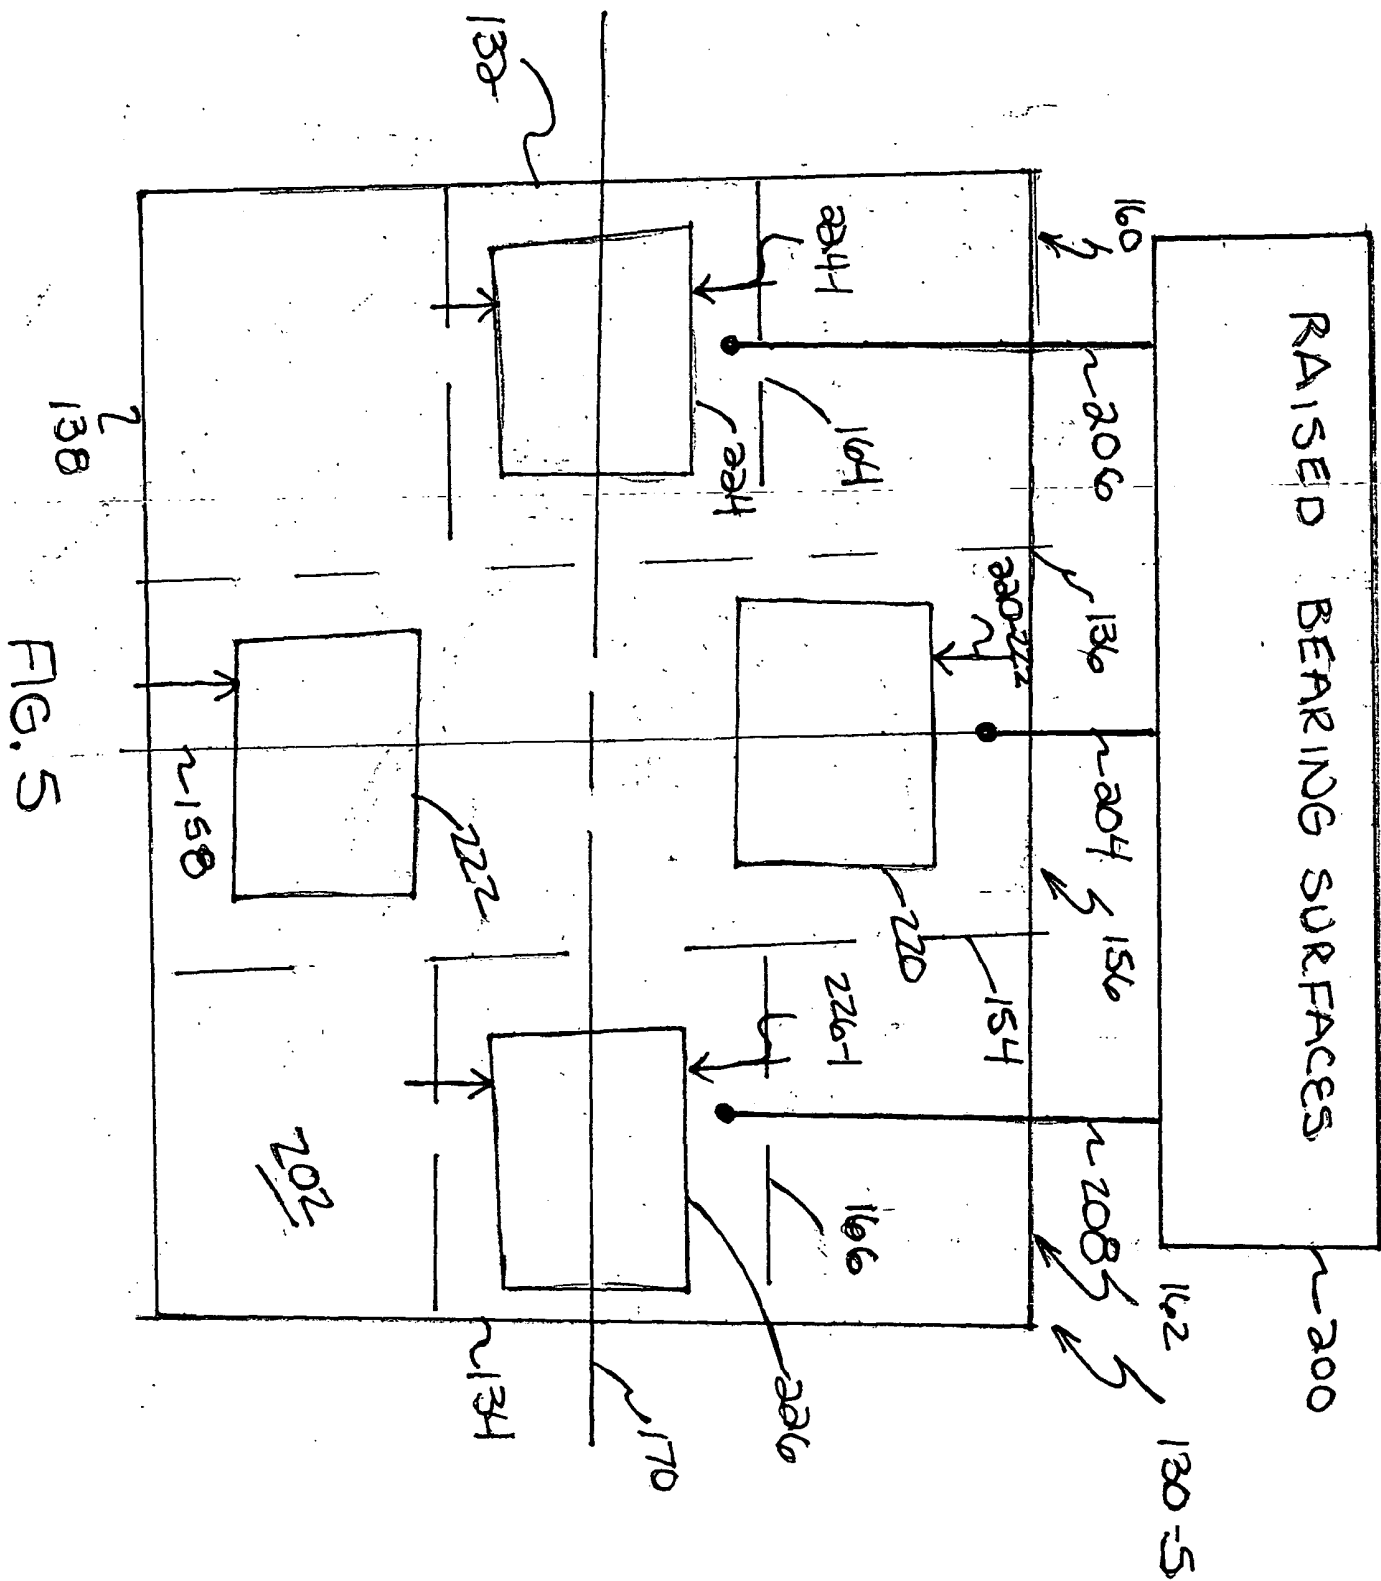


FIG. 3



FIG 4



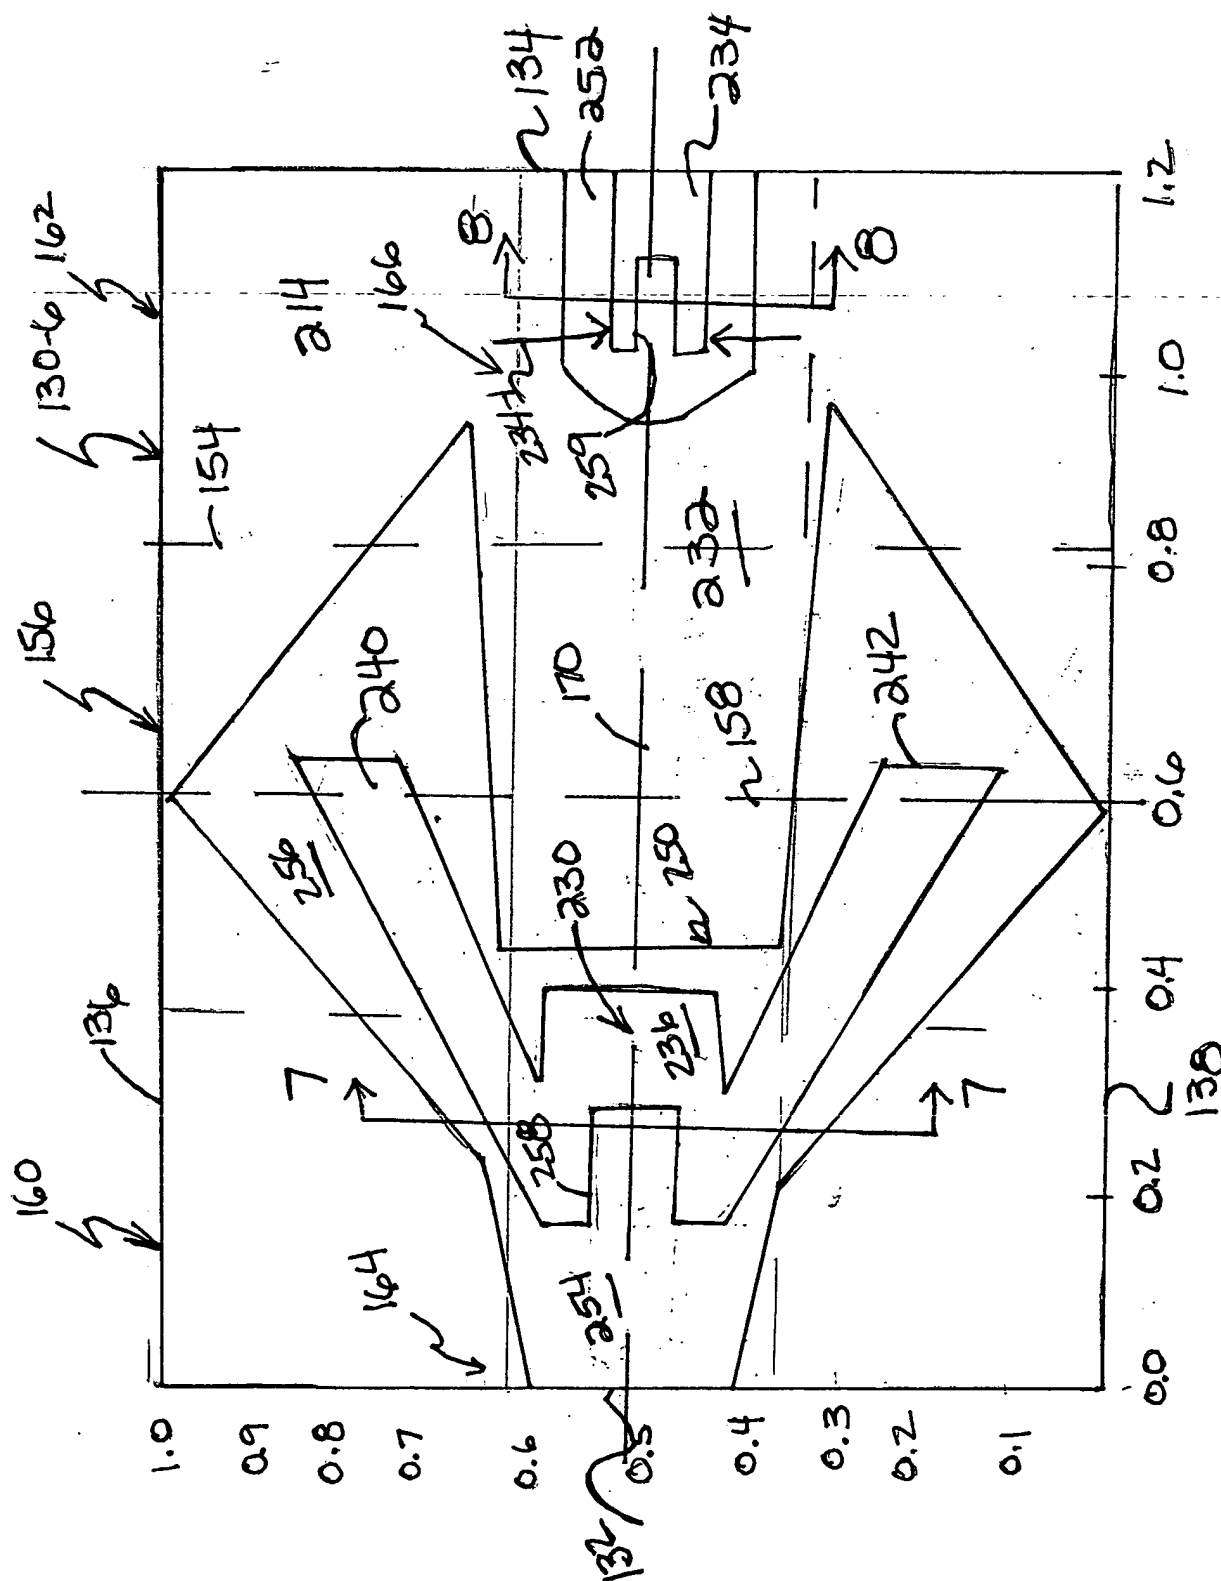


FIG. 6

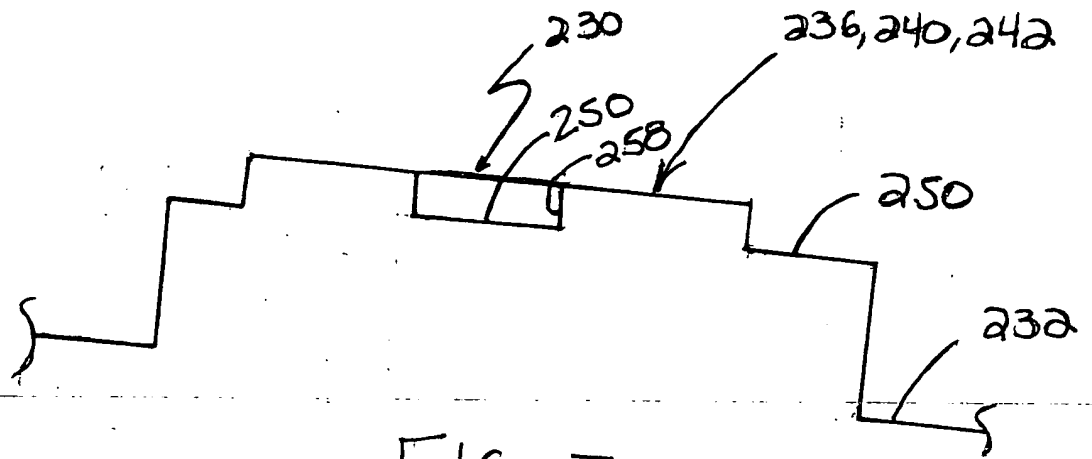


FIG. 7

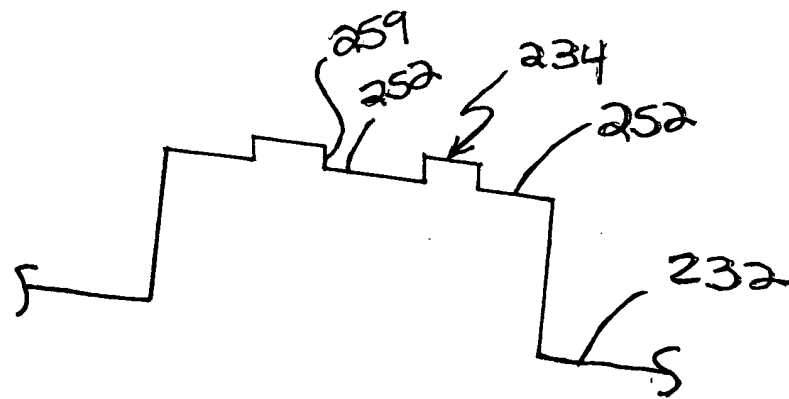
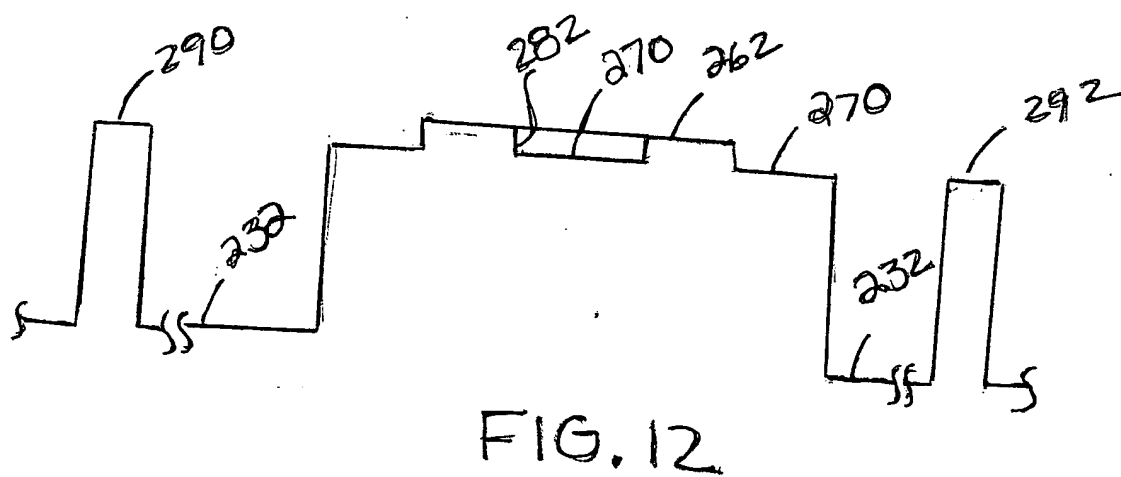
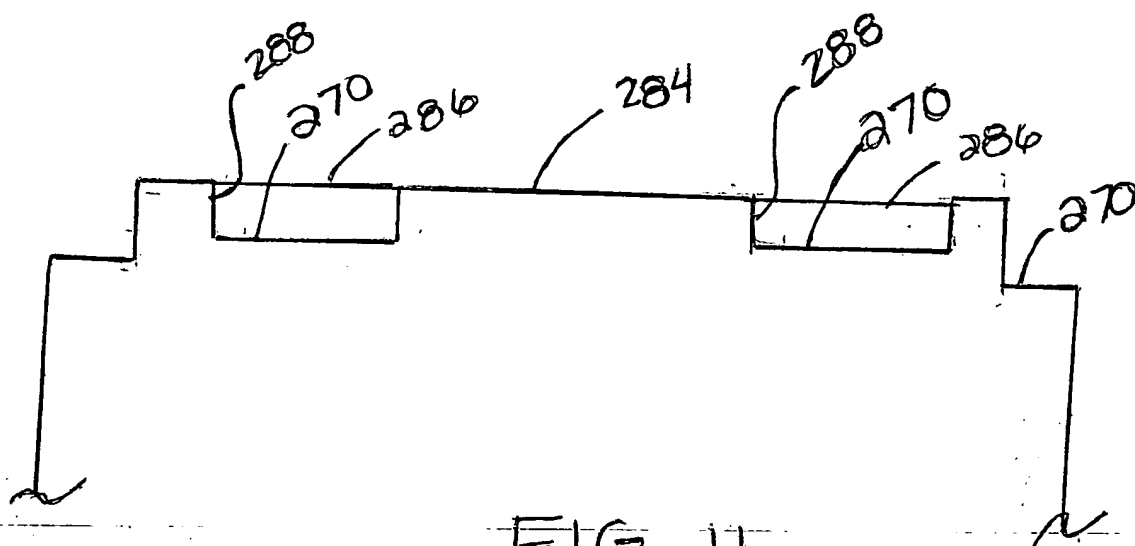
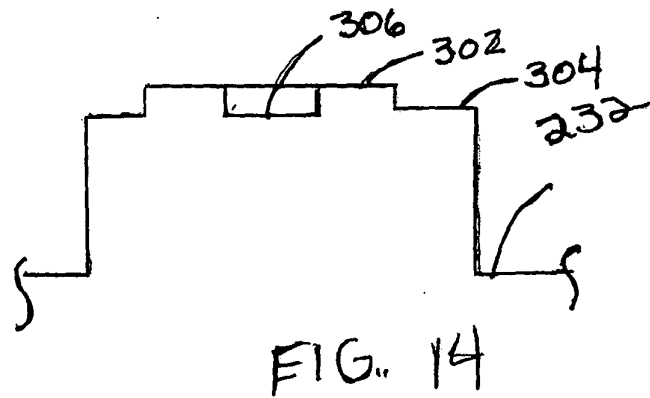
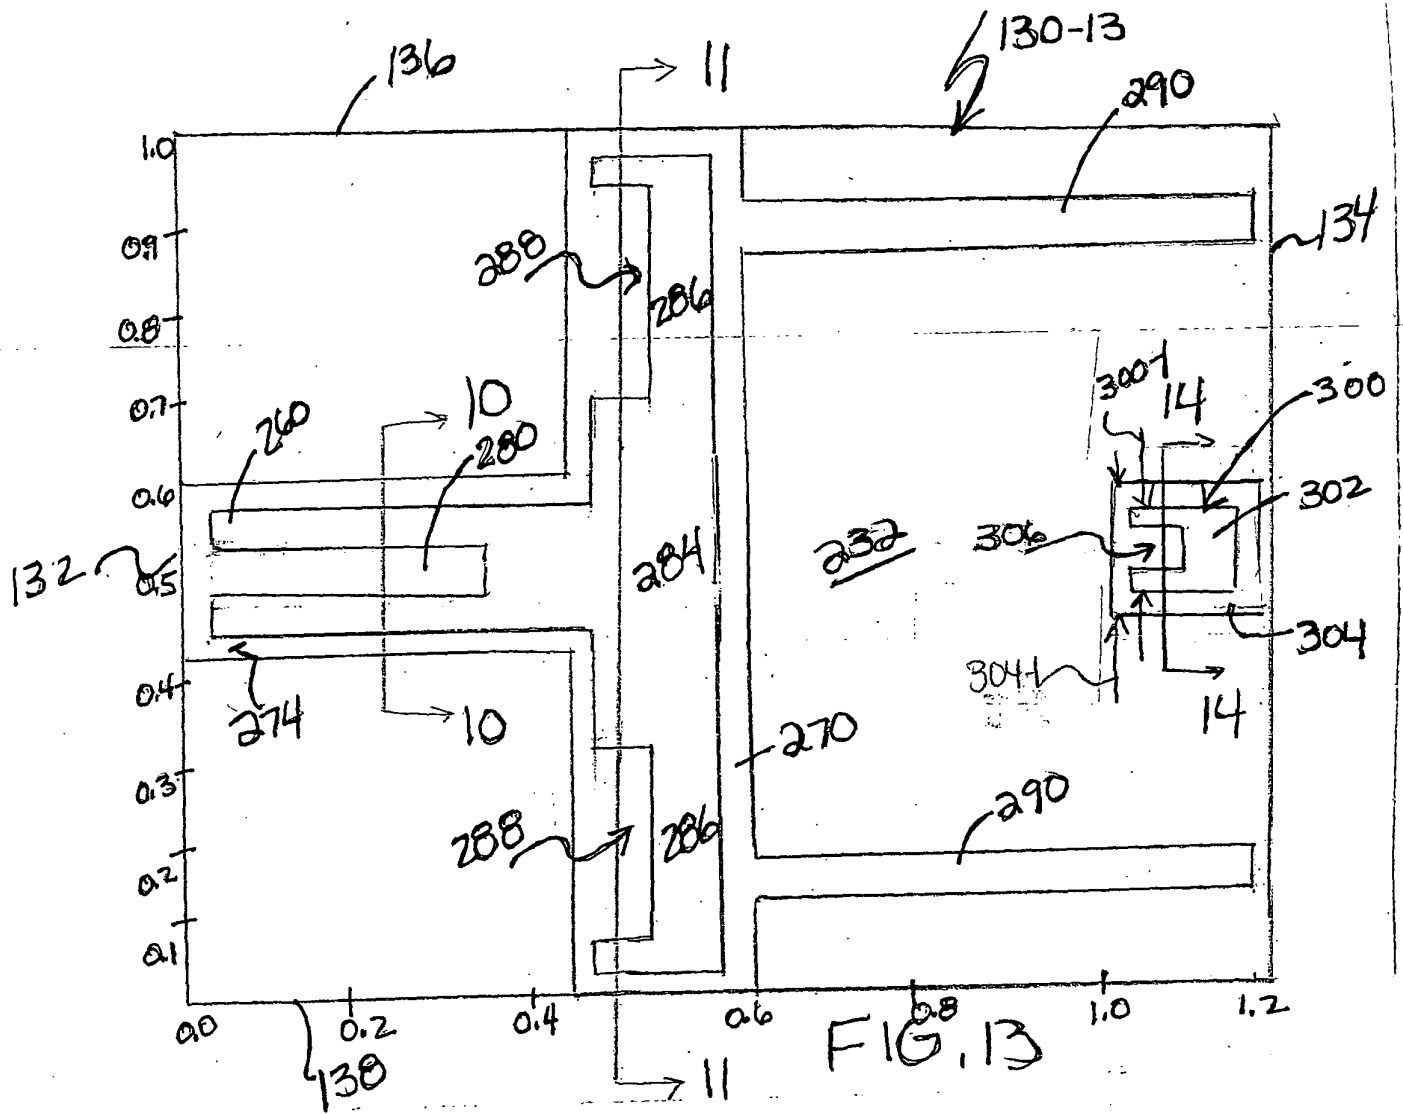
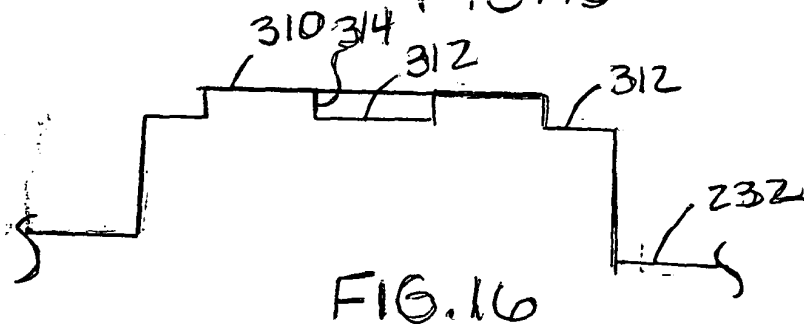
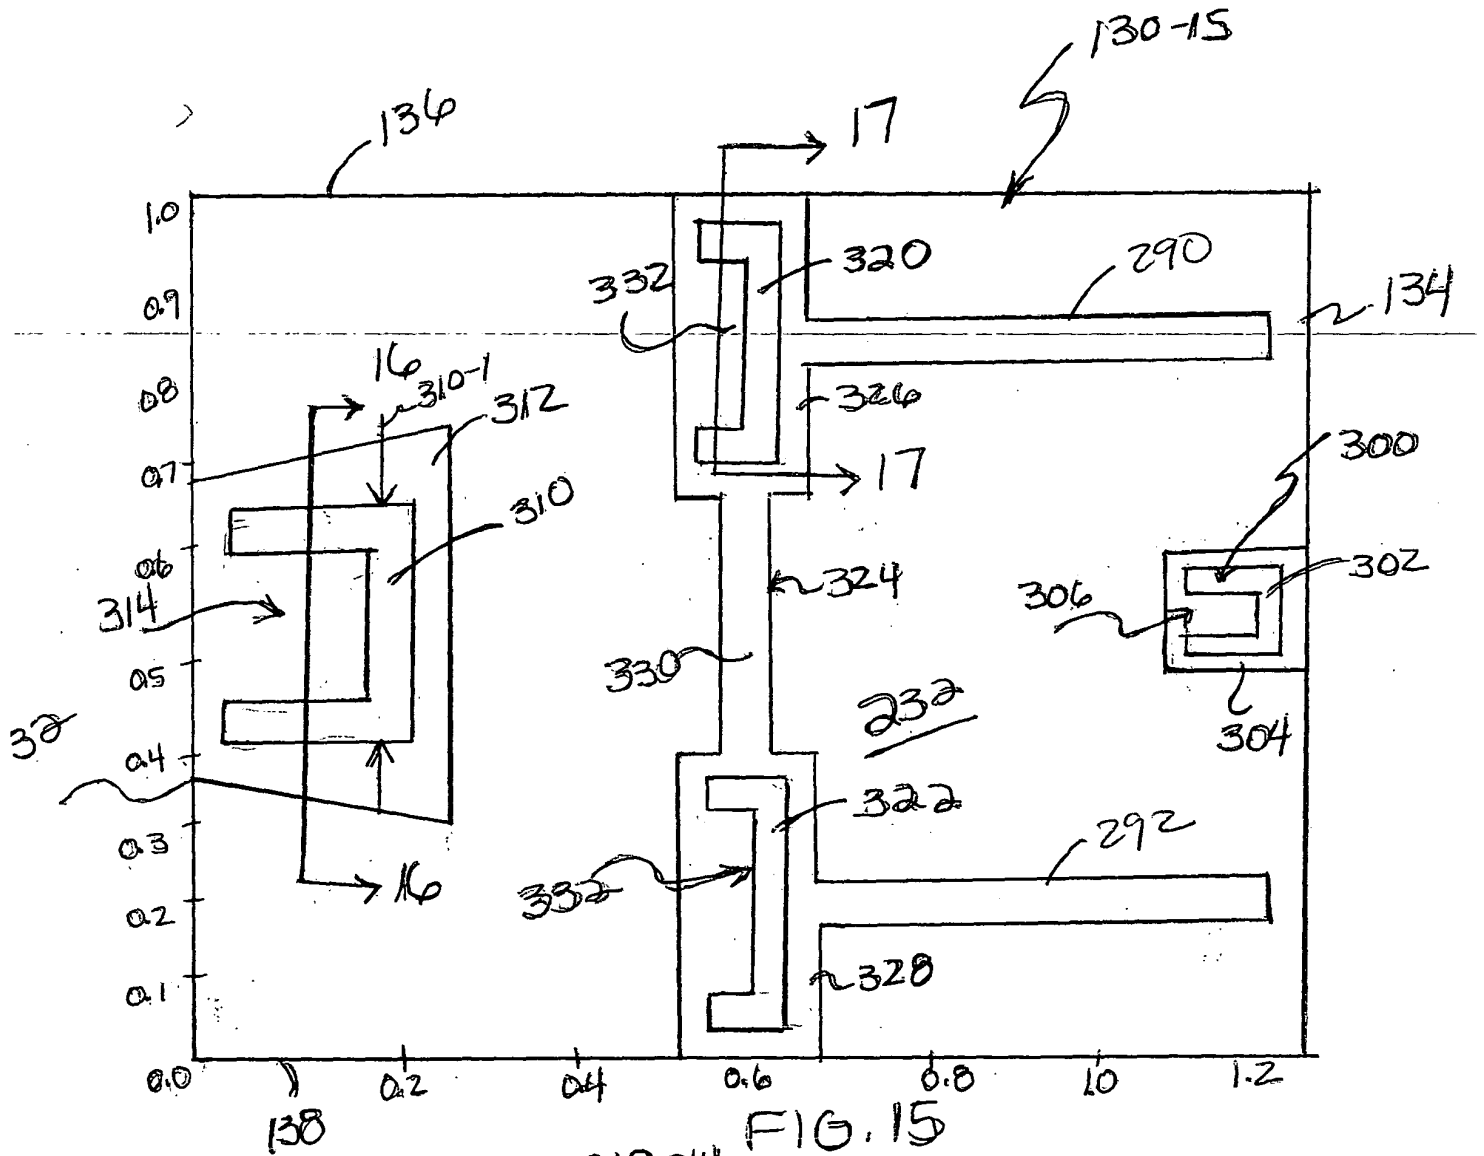


FIG. 8

A cross-sectional view of a semiconductor device. It features a central opening (280) within a top layer (260). The top layer is flanked by side regions (270). The entire structure is supported by a substrate (232). Arrows indicate the direction of light or signal passing through the opening.







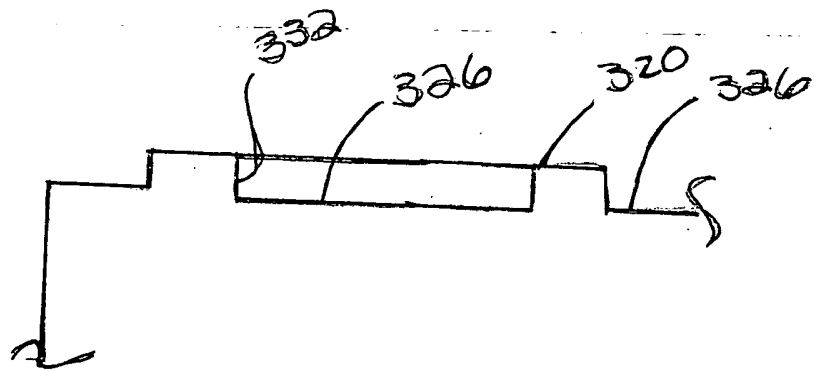


FIG. 17